

2. DUCTILE IRON



RESILIENT GATE VALVE
 - Kelas: PN10/PN16
 - Sistem sambungan: *flange*
 - Ukuran: 2" - 40"



RESILIENT CHECK VALVE
 - Sistem sambungan: *flange*
 - Ukuran: 2" - 24"



RESILIENT BUTTERFLY VALVE DOUBLE WAFER
 - Kelas: PN10/PN16
 - Sistem sambungan: *wafer*
 - Ukuran *Type Handle*: 2" - 12"



RESILIENT BUTTERFLY VALVE DOUBLE FLANGE
 - Kelas: PN10/PN16
 - Sistem sambungan: *flange*
 - Ukuran *Type Gear Box*: 2" - 48"

3. VALVE AKSESORIS




Y STRAINER
 - Sistem sambungan: *flange*
 - Ukuran: 2" - 16"



SEAL TAPE
 - Ukuran:
 a. Lebar: 12 mm, 19 mm, 25 mm
 b. Panjang: 10 m - 50 m
 c. Tebal: 0,075 mm - 0,2 mm

Quality Standard and Certification

- Sertifikasi SNI 03.0122.1998 kran air rumah tangga jenis katup pintu.
SNI 03.0122.1998 Certification for household water meter gate valve type.
- Sertifikasi SNI 05.0166.1998 katup pintu kuningan berulir 1,0 Mpa dan 1,5 Mpa (10 kgf/cm² dan 15 kgf/cm²).
SNI 05.0166.1998 Certification for brass threaded gate valve 1,0 Mpa and 1,5 Mpa (10 kgf/cm² and 15 kgf/cm²).
- Sertifikasi SNI 7427:2011 katup meter air.
SNI 7427:2011 Certification for water meter valve.
- Sertifikasi ISO 9001:2015.
ISO 9001:2015 Certification.

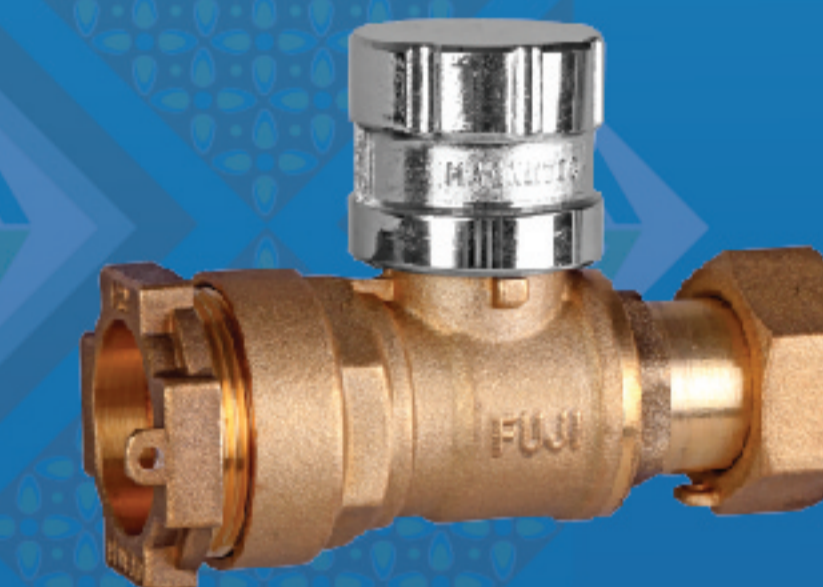

PT BARINDO ANGGUN INDUSTRI

Jl. Simopomahan 148 - 150P
 Tandes, Surabaya 60181
 ☎ (62-31) 7493333 (hunting)
 ☎ (62-31) 7493313
 ✉ info@barindo.com
 www.barindo.com



VALVE

1. BRASS



STOP VALVE/GATE VALVE/KATUP PINTU
 - Kelas: 125 WOG/150 WOG/200 WOG
 - Sistem sambungan: ulir standar BSPT/ISO 7/1
 - Ukuran: 1/2" - 4"
 - Class: 125 WOG/150 WOG/200 WOG
 - Connection system: thread standard BSPT/ISO 7/1
 - Size: 1/2" - 4"




CHECK VALVE/KATUP SEARAH HORIZONTAL
 - Sistem sambungan: ulir standar BSPT/ISO 7/1
 - Ukuran: 1/2" - 4"
 - Connection system: thread standard BSPT/ISO 7/1
 - Size: 1/2" - 4"



ATAP KRAN/BIB COCK/ KRAN AIR RUMAH TANGGA
 - Sistem sambungan: ulir standar BSPP/ISO 228/1
 - Ukuran: 1/2" - 3/4"
 - Connection system: thread standard BSPP/ISO 228/1
 - Size: 1/2" - 3/4"



PLUG KRAN/KATUP SUMBAT/PLUG VALVE
 - Sistem sambungan: ulir standar BSPT/ISO 7/1
 - Ukuran: 1/2" - 1"
 - Connection system: thread standard BSPT/ISO 7/1
 - Size: 1/2" - 1"

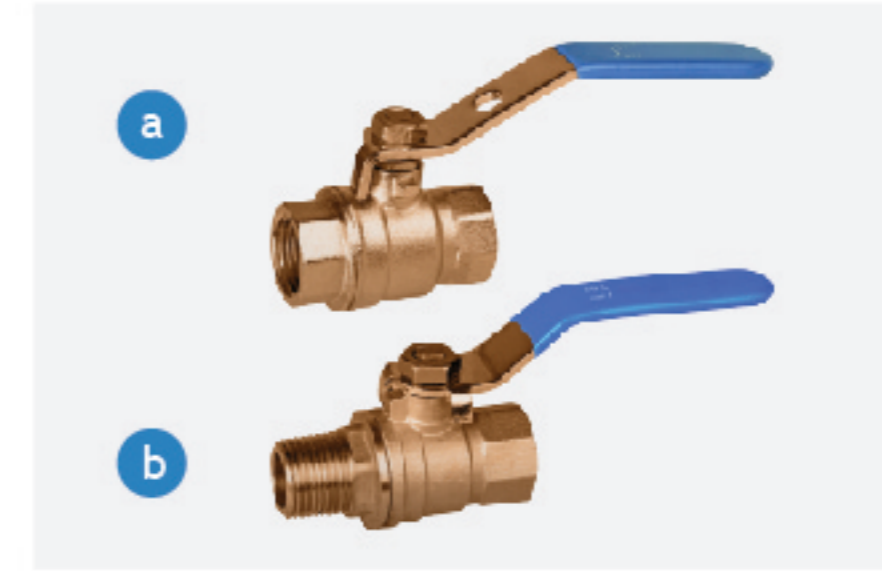

BALL VALVE
 - Kelas: PN10/PN16
 - Sistem sambungan: ulir standar BSPT/ISO 7/1
 - Ukuran: a. Female x Female: 1/4" - 4"
 b. Male x Female: 1/2" - 1"
 - Class: PN10/PN16
 - Connection system: thread standard BSPT/ISO 7/1
 - Size: a. Female x Female: 1/4" - 4"
 b. Male x Female: 1/2" - 1"



FLOATING VALVE/FLUTTER
 - Sistem sambungan: ulir standar BSPP/ISO 228/1
 - Ukuran: 1/2" - 1"
 - Connection system: thread standard BSPP/ISO 228/1
 - Size: 1/2" - 1"



Y STRAINER/FILTER Y/SARINGAN Y
 - Sistem sambungan: ulir standar BSPT/ISO 7/1
 - Ukuran: 1/2" - 2"
 - Connection system: thread standard BSPT/ISO 7/1
 - Size: 1/2" - 2"



MAGNETIC LOCKABLE BALL VALVE (FOR THREADED PIPE WITH COUPLING - SHORT TYPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: ulir standar BSPT/ISO 7/1
 - Ukuran: 1/2" - 2"
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: thread standard BSPT/ISO 7/1
 - Size: 1/2" - 2"
 - Equipped with a magnetic locking system



MAGNETIC STRAIGHT LOCKABLE BALL VALVE (FOR HDPE PIPE WITH COUPLING-NORMAL TYPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: inlet compression fitting (untuk disambung pipa plastik) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: inlet compression fitting (to connect plastic pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Equipped with a magnetic locking system



MAGNETIC STRAIGHT LOCKABLE BALL VALVE (FOR THREADED PIPE WITH COUPLING)
 - Kelas: PN10/PN16
 - Sistem sambungan: ulir standar BSPT/ISO 7/1 (untuk disambung pipa GI) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: DN15 x 3/4" x 1/2", DN15 x 3/4" x 3/4"
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: thread standard BSPT/ISO 7/1 (to connect GI pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: DN15 x 3/4" x 1/2", DN15 x 3/4" x 3/4"
 - Equipped with a magnetic locking system



MAGNETIC ANGLE LOCKABLE BALL VALVE (FOR THREADED PIPE WITH COUPLING)
 - Kelas: PN10/PN16
 - Sistem sambungan: ulir standar BSPT/ISO 7/1 (untuk disambung pipa GI) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: DN15 x 3/4" x 1/2", DN15 x 3/4" x 3/4"
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: thread standard BSPT/ISO 7/1 (to connect GI pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: DN15 x 3/4" x 1/2", DN15 x 3/4" x 3/4"
 - Equipped with a magnetic locking system



MAGNETIC ANGLE LOCKABLE WITH CHECK VALVE (FOR HDPE PIPE WITH COUPLING)
 - Kelas: PN10/PN16
 - Sistem sambungan: inlet compression fitting (untuk disambung pipa plastik) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: inlet compression fitting (to connect plastic pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Equipped with a magnetic locking system



ANGLE LOCKABLE BALL VALVE (FOR HDPE PIPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: inlet compression fitting (untuk disambung pipa plastik) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Dilengkapi alat pengunci sistem mekanis
 - Class: PN10/PN16
 - Connection system: inlet compression fitting (to connect plastic pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Equipped with a mechanical locking system



ANGLE LOCKABLE BALL VALVE (FOR THREADED PIPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: ulir standar BSPT/ISO 7/1 (untuk disambung pipa GI) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: DN15 x 3/4" x 1/2", DN15 x 3/4" x 3/4"
 - Dilengkapi alat pengunci sistem mekanis
 - Class: PN10/PN16
 - Connection system: thread standard BSPT/ISO 7/1 (to connect GI pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: DN15 x 3/4" x 1/2", DN15 x 3/4" x 3/4"
 - Equipped with a mechanical locking system



STRAIGHT LOCKABLE BALL VALVE (FOR HDPE PIPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: inlet compression fitting (untuk disambung pipa plastik) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Dilengkapi alat pengunci sistem mekanis
 - Class: PN10/PN16
 - Connection system: inlet compression fitting (to connect plastic pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: DN15 x 3/4" x 20 mm, DN15 x 3/4" x 25 mm
 - Equipped with a mechanical locking system



METER VALVE WITH CHECK VALVE AND COUPLING SNI (FOR THREADED PIPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: ulir standar BSPT/ISO 7/1 (untuk disambung pipa GI) dan outlet coupling ring dengan ulir 3/4" standar BSPP/ISO 228/1
 - Ukuran: 3/4" x 1/2" dan 3/4" x 3/4"
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: thread standard BSPT/ISO 7/1 (to connect GI pipe) and outlet coupling ring with thread 3/4" standard BSPP/ISO 228/1
 - Size: 3/4" x 1/2" and 3/4" x 3/4"
 - Equipped with a magnetic locking system



METER VALVE REDUCED PORT (FOR THREADED PIPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: inlet menggunakan adaptor compression fitting (untuk disambung pipa plastik) atau adapter ulir standar BSPT/ISO 7/1 (untuk disambung pipa GI) dan outlet ulir standar BSPT/ISO 7/1
 - Ukuran: 1/2" x 1/2" dan 1/2" x 3/4"
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: inlet using adaptor compression fitting (to connect plastic pipe) or adaptor thread standard BSPT/ISO 7/1 (to connect GI pipe) and outlet thread standard BSPT/ISO 7/1
 - Size: 1/2" x 1/2" and 1/2" x 3/4"
 - Equipped with a magnetic locking system



METER VALVE WITH CHECK VALVE SNI (FOR THREADED PIPE)
 - Kelas: PN10/PN16
 - Sistem sambungan: inlet menggunakan adaptor compression fitting (untuk disambung pipa plastik) atau adapter ulir standar BSPT/ISO 7/1 (untuk disambung pipa GI) dan outlet ulir standar BSPT/ISO 7/1
 - Ukuran: 1/2" x 1/2", 1/2" x 3/4", 1/2" x 20 mm, 1/2" x 25 mm
 - Dilengkapi alat pengunci sistem magnetis
 - Class: PN10/PN16
 - Connection system: inlet using adaptor compression fitting (to connect plastic pipe) or adaptor thread standard BSPT/ISO 7/1 (to connect GI pipe) and outlet thread standard BSPT/ISO 7/1
 - Size: 1/2" x 1/2", 1/2" x 3/4", 1/2" x 20 mm, 1/2" x 25 mm
 - Equipped with a magnetic locking system